


XP SERIES SPECIFICATIONS		XP-24	XP-32	XP-45
MACHINE CAPACITY	X Travel	24"	32"	45"
	Y Travel	18"	22"	24"
	Z Travel	18"	22"	25"
	Table Load (Evenly Distributed)	2,000 lbs.	2,500 lbs.	4,000 lbs.
	Table Size	17.5" x 28"	21.5" x 35.5"	24.0" x 51.0"
	T-Slots (No./Width)	4 / .551"	5 / .708"	5 / .708"
	Table Top to Floor	28"	30"	24"
SPINDLE	Motor (Peak)	30.0 HP		
	Spindle Speed (RPM)	60 -15,000 RPM (24K, 32K Opt)		
	Spindle Torque	155 ft/lbs @ 350 RPM		
	Tool Type/Taper	Big Plus CAT 40 (BT Opt)		
	Spindle Nose to Table (Max-Min)	4" - 22"	4" - 26"	4" - 29"
	Spindle Center to Column	18"	20.5"	26"
ATC	Tool Storage Capacity	24 Station High Speed Arm Type (30, 40 option)		
	Tool Change Time	1.5 seconds		
	Max. Tool Diameter (full)	3.2"		
	Max. Tool Diameter (adjacent empty)	5.9"		
	Max. Tool Weight	15.4 lbs.		
	Max. Tool Length	13"		
PERFORMANCE	Positioning Accuracy	+/- 0.0002"		
	Positioning Repeatability	+/- 0.0001"		
	Resolution	0.0001"		
	Rapid Traverse	1,900 X, Y, Z		
	Cutting Feed Rate	.001 - 1,200 IPM		
	Servo Type	AC Digital Brushless		
	Axis Thrust (Peak)	4,400 lbs. X, Y, Z		
GENERAL INFO	Air Pressure Requirements	90 PSI; 5 CFM		
	Coolant Capacity	90 Gallons		
	Coolant Flow	9 Gal/Min		
	Door Open Width	28"	35"	48"
	Power Requirements	40 AMP 400-500 VAC 3 Phase (220 VAC optional)		
	Shipping Dimensions* (WxDxH)	83" x 76" x 72"	93" x 86" x 76"	127" x 87" x 87"
	Operating Dimensions (WxDxH)	83" x 76" x 85"	93" x 86" x 89"	127" x 104" x 110"
	Machine Weight	8,500 lbs.	10,500 lbs.	12,500 lbs.

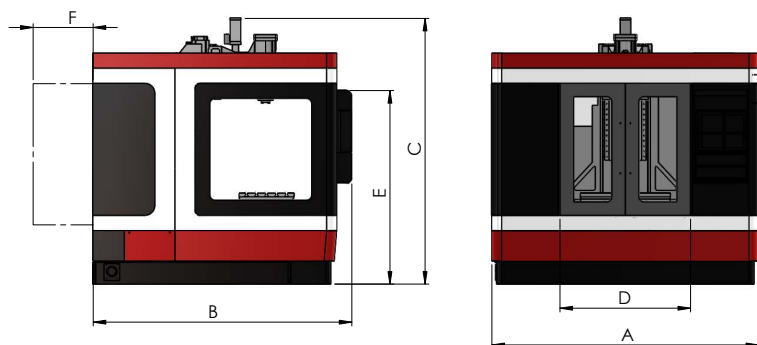

	XP-24	XP-32	XP-45
Overall Width (A)	83"	93"	127"
Overall Depth (B)	76"	86"	104"
Maximum Machine Height (C)	85"	89"	110"
Door Width (D)	28"	35"	48"
Console Height (E)	62"	62"	62"
Electrical Cabinet Swing (F)	36"	36"	36"

\* Requires some disassembly to meet these minimum dimensions. Contact factory for more information.

© 2018 Fryer Machine Systems, Inc. rev 010918  
Specifications subject to change without prior notice.